


## Technical Specifications



OPTICAL	
Display device	0.59" aspect ratio 16:10
Resolution	WXGA (1280 x 800)
Brightness	5000lm
Contrast ratio	10,000:1
Standard Lens	Manual focus, manual zoom x 1.6
Lens shift	Manual (V:0-50%,H:±5%)
Lamp wattage	300W
Diagonal display size	30"~300"
Lamp life	4000 hours (Normal Mode) / 6000 hours (Eco Mode)*
Distance to width ratio	1.4~2.3
COMPATIBILITY	
Computer compatibility	VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+, WSXGA+, UXGA, WUXGA, MAC 16"
Composite/S-Video	NTSC, PAL, SECAM, PAL-M, PAL-N, NTSC4.43
Component Video/HDMI	525i(480i), 525p(480p), 625i(576i), 1125i(1080i@50/60), 750p(720p@50/60), 1125p(1080p@50/60)
FEATURES	
Picture adjustments	Perfect Fit & V/H Keystone
Advances features	Accentualizer technology, DICOM simulation, Instant stack, HDCR (High Dynamic Contrast Range), Edge blending, Warping, HDBaseT (only CP-X5555), Image Optimizer, PinP, PbyP, Picture Shift, Cloning function
Network	Projector control, Network presentation, Wireless capability, AMX Device Discovery, Crestron RoomView® compatible, Extron XTP system compatible
Security	Password/My Screen, PIN Lock, Key lock
OSD languages	English, French, Germany, Spanish, Italian, Norwegian, Dutch, Portuguese, Japanese, Traditional Chinese, Simplified Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkish, Persian, Arabian, Thai, Danish, Czech, Hungarian, Romanian, Slovenian, Croatian, Lithuanian, Estonian, Latvian, Greek, Brasileiro, Indonesian, Vietnamese
CONNECTIONS	
Digital input	2 x HDMI connector (HDCP1.4 compliant)
HD Base T	No (CP-WX5500)/Yes (CP-WX5505)
Computer input	1 x Mini-D-sub 15-pin connector
Monitor output	1 x D-sub 15-pin connector, 1 x HDMI
Video input	1 x RCA connector
Control	1 x D-sub 9-pin connector
USB	1 x USB Type A (Used for wireless network)
Wired network	1 x RJ45 jack
Wireless network	IEEE802.11b/g/n (Optional USB wireless adaptor is required)
Wired remote control (in/out)	1 x 3.5mm mono mini connector
PHYSICAL	
Dimensions (W x H x D)	460 x 138 x 334mm (excluding feet and extrusions)
Weight	<6.5kg (TBD)
Noise level	TBC
Operating temperature	0 -40°C (Normal mode) / 0-45°C (Eco Mode)
Air filter	10,000 hours
OPTIONAL ACCESSORIES	
Lamp	TBC
Filter	TBC
USB wireless adapter	USB-WL-11N
WARRANTY	
Projector/Lamp	3 Years / 6 Months**

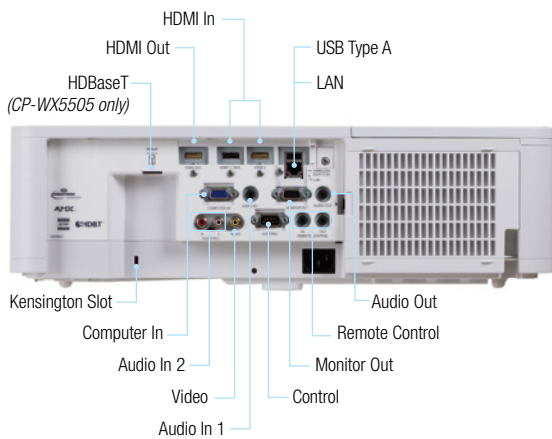

\*The stated lamp and filter life refers to the average life expected in ideal operating conditions with usage in accordance with the manual. The majority of, but not all lamps and filters should achieve this figure. \*\*Where a lamp fails within warranty and a replacement lamp is taken, the warranty for the replacement lamp will be a maximum of 6 months (dependent on warranty hours stated). . HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. AMX and the AMX logo, and Device Discovery are all registered trademarks of AMX. Crestron® and RoomView™ are registered trademarks or trademark of Crestron Electronics, Inc. The specification above and photography is for reference only and may be subject to change.